

STRUCTURE CABLING

UNSHIELDED PLUG MODULE

VK-788Y-C6A



- RJ45 UTP TOOLLESS PLUG

VK-702S-2-C6A



- RJ45 UTP TOOLLESS PLUG

VK-701-C6A




- RJ45 UTP TOOLLESS PLUG

VK-G70U-C6A



- RJ45 UTP TOOLLESS PLUG

VK-9418S-C6A

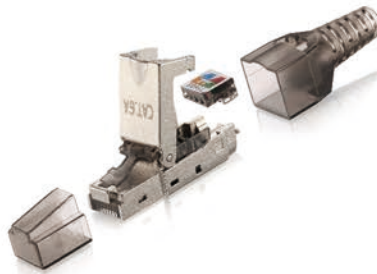

- Shielded, 180 Degree Toolless Type

VK-9419-C6A



- Cat.6A UTP Toolless Plug

VK-9428S-C6A



- Shielded, 180 Degree Toolless Type

VK-9348-C6A



- Cat.6A UTP Toolless Connection Module

- Insertion-extraction life: Min.750 cycles
- Contact resistance: Max. 20 mOhm
- Insulation resistance: Min. 100 MOhm @ 500 Vdc
- Dielectric withstanding voltage: 1,0 kVdc for 1 minute
- Compliance: Category 5E-Class D
- Approvals: ISO/IEC 11801:2011 EN 50173-1:2011 ANSI/TIA-568-C.2
- Compliance: Category 6-Class E
- Aprovals: ISO/IEC 11801:2011 EN 50173-1:2011 ANSI/TIA-568-C.2 IEC 60603-7-5