


Ordering Information

Optical Splice Trays

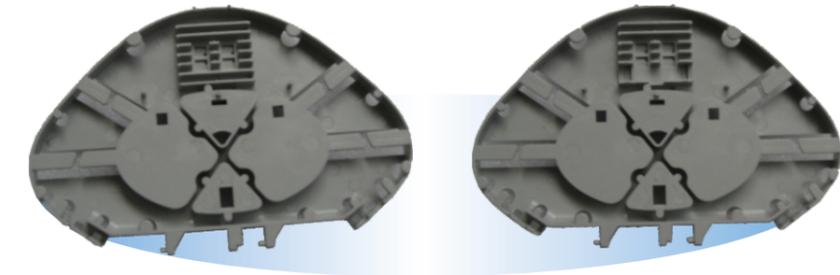

Splice Tray(057#)
146X97X9.5mm

Splitter Tray
146X97X9.5mm

Type	Splice Tray Capacity	Splitter Tray	NO. Of Splitter	Max.Capacity
GJS-2016 I(Bunchy)	12 pcs (6-12f per tray)	None	None	144F
GJS-2016 II(Bunchy)	8 pcs (6-12f per tray)	4	2-1:8	96F

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Seal tape	1 roll	
2	Insulation tape	1 pc	
3	Abrasive cloth	1pc	
4	Earthing wire	1pc	
5	Nylon tie	1set	

No.	Name	Quantity	
6	Heat shrinkable protective sleeve	1 bag	
7	Desiccant	2 bags	
8	Special wrench	3 pcs	
9	Hose clamp II	2 pcs	

Optional Accessories:

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	
4	Fiber Cleaningpapers	1 bag	

No.	Name	Quantity	
5	Pole mounting	1 set	
6	Wall mounting	1 set	
7	Silica gel	1 bag	


Features

- The closure adopts mechanical sealing structure. There is one oval shaped cable port entrances in base. The big entrance is used for the sealing of uncut straight-through fiber cable, the small ports are used for branch fiber cable and drop cable.
- To adopt engineering PC plastic with high-strength to make the closure has longer life time and excellent sealing performance.
- It can be installed four splitter tray and 1:8 bare PLC Splitters.
- There are different drop cable elements to be chosen (Φ5-Φ11.5). Max. 8 pcs drop cable input/output (special type can be customized).
- The patented sealing structure keep good sealing performance after re-entry and re-using.
- It could save the installation time and improve work efficiently.

Applications

- ◆ Suitable for bunchy fibers
- ◆ Aerial, underground, wall-mounting, hand hole-mounting and duct-mounting
- ◆ It's especially applicable to FTTH optical fiber distribution

Structural Drawing

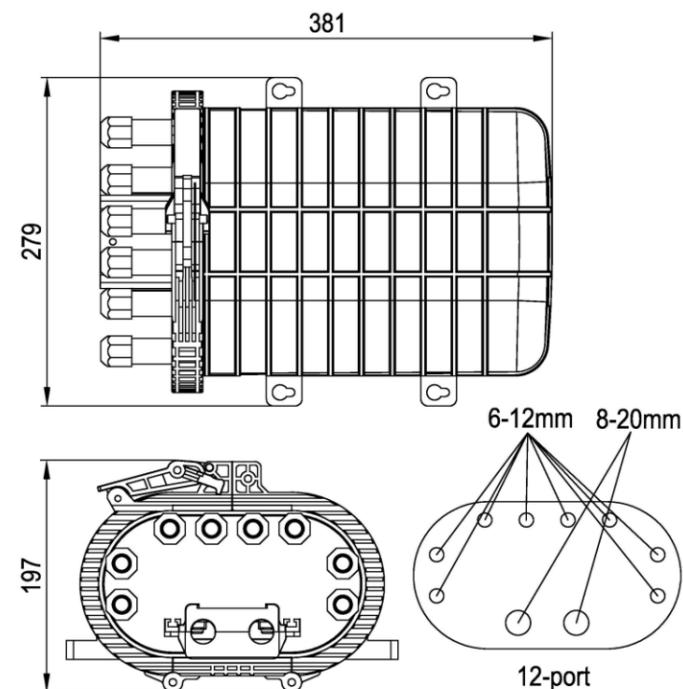

GJS-2016