HI-SUN
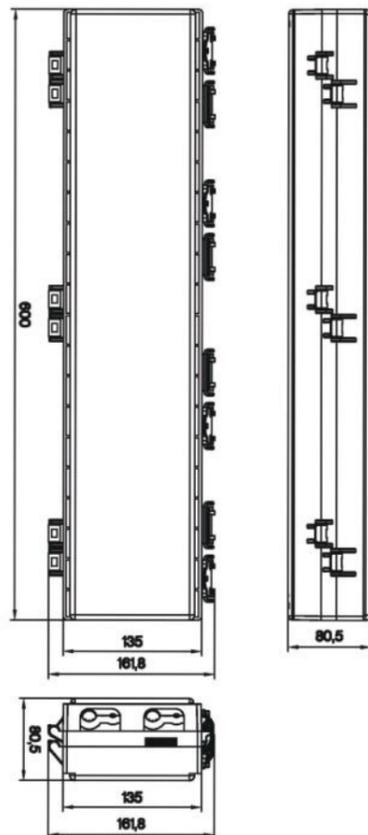
Features

- The closure adopts horizontal mechanical sealing and advanced internal structure design.
- It can be installed two 1:8 Blockless PLC splitters or one 1:16 Blockless PLC splitter.
- 4 pcs 8 ~ 16mm main cable both ends in and out.
- 16 pcs 2*3mm drop cable both ends in and out.
- The closure is spacious enough for winding and storing fibers.
- The patented sealing structure keep good sealing performance after re-entry and re-using.
- Easy open and close of closure with very little tool.
- 24cores Fusing Splice available (Max. 48cores)

Applications

- Messenger Installation available in the Closure
- Mid-Span Branch, Aerial mounting
- Separated in PLC Splitter Room and Fusion Splice Room
- It's especially applicable to FTTH optical fiber distribution

Structural Drawing

GJS-2018

Ordering Information

Optical Splice Trays

340X92X14.2mm

Type	Splice Tray Capacity	Splitter Tray (Blockless Type PLC Splitter)	Number of Adaptor	Max. Capacity	Suitable Cable Dia. Allowed
GJS-2018-I	24-48F	1pc1:8	9 pcs	24-48F	4-Φ8 ~ Φ16mm
GJS-2018-II	24-48F	2pcs 1:8	18 pcs	24-48F	
GJS-2018-III	24-48F	1pc1:16	18 pcs	24-48F	16-2*3mm

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Heat shrinkable protective sleeve	1 bag	
2	Nylon tie	1 bag	
3	Silicon oil	1 bottle	
4	Seal tape	1 roll	

No.	Name	Quantity	
5	Desiccant	2 bags	
6	Pigtail	1pc	
7	Buffer tube for bunchy fiber	1 roll	
8	Abrasive cloth	1 pc	

Optional Accessories:

No.	Name	Quantity	
1	Hanging hook	1 set	