




Features

- The closure adopts horizontal mechanical sealing and advanced internal structure design.
- It can be installed two 1:8 or one 1:16 PLC splitter.
- 16 pcs 2*3mm drop cable both ends in and out.
- The closure is spacious enough for winding and storing fibers.
- The patented sealing structure keep good sealing performance after re-entry and re-using.
- Easy open and close of closure with very little tool.
- 24cores Fusing Splice available (Max. 48cores)

Applications

- ◆ Suitable for bunchy fibers
- ◆ Aerial, wall-mounting
- ◆ It's especially applicable to FTTH optical fiber distribution

Structural Drawing

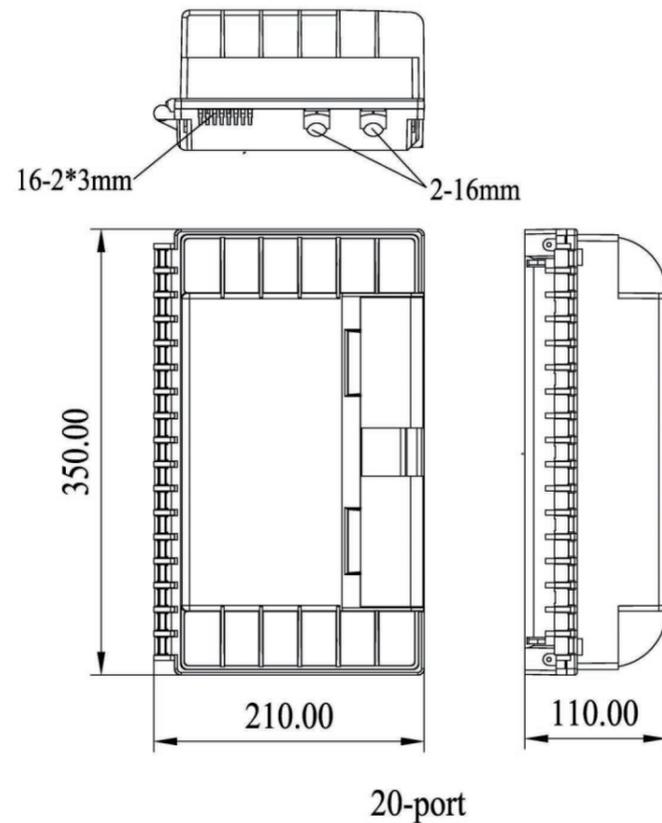

Ordering Information

Optical Splice Trays



240X157X22mm

Type	Splice Tray Capacity	Splitter Tray (Blockless Type PLC Splitter)	Number of Adaptor	Max. Capacity	Suitable Cable Dia. Allowed
GJS-2019	24-48F	1pc 1:16	16 pcs	24-48F	4-Φ8 ~ Φ16mm 16-2*3mm

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Seal tape	1 roll	
2	Labeling paper	1 pc	
3	Abrasive cloth	1 pc	
4	Insulation tape	1 roll	

No.	Name	Quantity	
5	Nylon tie	1 set	
6	Desiccant	2 bags	
7	Heat shrinkable protective sleeve	1 bag	
8	Hanging hook	1 set	

Optional Accessories:

No.	Name	Quantity	
1	Buffer tube for bunchy fiber	1 roll	
2	Adapter	-	

No.	Name	Quantity	
3	Wall mounting bracket	1 set	
4	Pigtail	-	