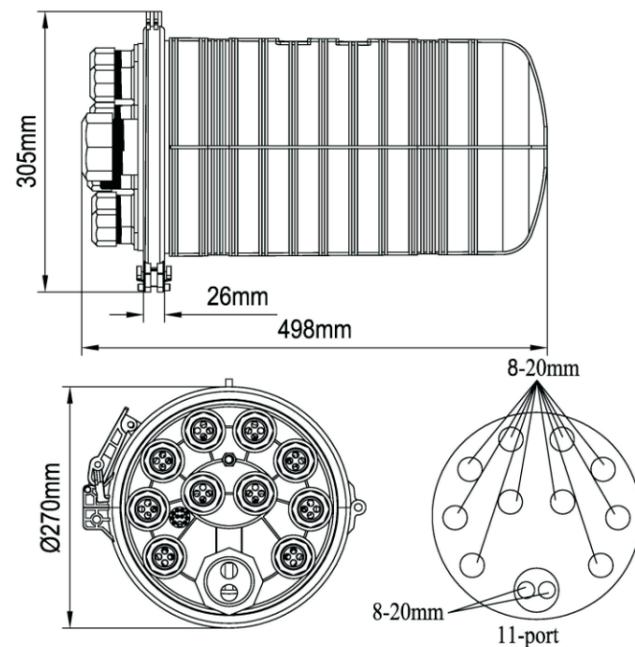# HI-SUN

Features

- The closure adopts mechanical sealing structure. There is one oval shaped cable port entrances in base. The big entrance is used for the sealing of uncut straight-through fiber cable, the small ports are used for branch fiber cable and drop cable.
- To adopt engineering PC plastic with high-strength to make the closure has longer life time and excellent sealing performance.
- It can be installed three splitter tray and 1:8 bare PLC Splitters.
- There are different drop cable elements to be chosen (Φ5-Φ7). Max. 10 pcs drop cable input/output (special type can be customized).
- The patented sealing structure keep good sealing performance after re-entry and re-using.
- It could save the installation time and improve work efficiently.

Applications

- Suitable for bunchy fibers
- Aerial, underground, wall-mounting, hand hole-mounting and duct-mounting
- It's especially applicable to FTTH optical fiber distribution

Structural Drawing

305mm
26mm
498mm
Ø270mm
8-20mm
8-20mm
11-port

GJS-2020

Ordering Information

Optical Splice Trays

Splice Tray(057#)
146X97X9.5mm

Splitter Tray
146X97X9.5mm

Splice Tray(070#)
134X115X4mm

Splice Tray(071#)
134X115X8mm

Type	Splice Tray Capacity	Splitter Tray	NO. Of Splitter	Max.Capacity
GJS-2020 I(Bunchy)	64pcs (6-12f per tray)	None	None	768F
GJS-2020 II(Bunchy)	21pcs (6-12f per tray)	3	3-1:8	264F

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Seal tape	1 roll	
2	Insulation tape	1 pc	
3	Abrasive cloth	1pc	
4	Earthing wire	2sets	
5	Nylon tie	1set	

No.	Name	Quantity	
6	Heat shrinkable protective sleeve	1 bag	
7	Desiccant	2 bags	
8	Special wrench	2 pcs	
9	Hose clamp I	12pcs	
10	Hose clamp II	2 pcs	

Optional Accessories:

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	
4	Pigtail	-	
5	Aerial mounting	1 set	

No.	Name	Quantity	
6	Metal hoop	1 set	
7	Metal wrench (large size)	1 pc	
8	Wall mounting	1 set	
9	Pole mounting	1 set	