


3M Patch Panel and Keystone



VP-7524S-3M

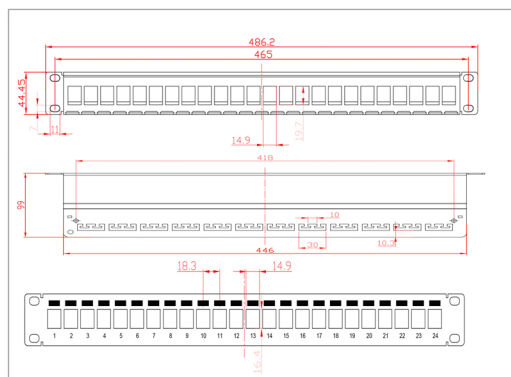


Material

- Panel: 1.5mm thickness aluminum panel
- /RAL9005.
- Category 6A component certification
- According to ISO/IEC 11801 and EN 50173
- 24 x totally shielded/unshielded RJ45 jacks



VK-8097S-C6A



VK-8098S-C6A



VK-8099-C6A

Specifications

- Meet TIA/EIA-568-A and TIA/EIA-568-B Category 6 /5 requirements.
- Meet TIA/EIA TSB-40
- Meet ISO/IEC Generic Cabling Standard 11801
- Meet CENELEC Generic Cabling Standard EN50173
- Angle: 180 Degree
- Termination: Krone- 110- DUAL Type

Electrical

- According to UL 1863
- Current rating: 1.5 Amp Max.
- Voltage rating: 150 Volts
- Contact resistance: 20 m-ohm
- Insulation resistance: 500M-ohm
- Dielectric Withstand Voltage: 1000 V AC RMS, 60Hz 1min

Materials

- Housing: PC UL94V-0
- IDC: PC UL94V-0, Accept 22-26 AWG Solid Wire.
- PCB: FR4 1.6mm(0.04") thickness, 2 layers
- Contact: PC UI94V-0, 0.45mm(0.018") Diameter Phosphor bronze with 3 U" to 50 U" Gold plating on contact area