


## Ordering Information

### Optical Splice Trays

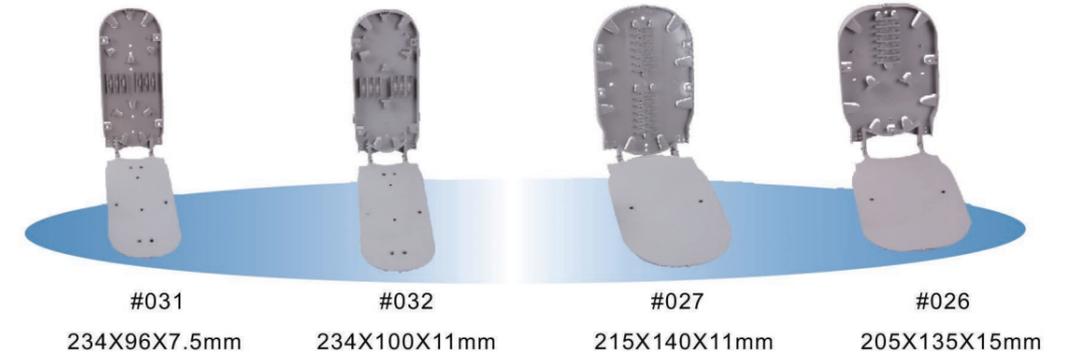

Type	Fibers/Tray	Max. Capacity	Tray#	Suitable Cable Dia. allowed(mm)
GJS-6004 I(Bunchy)	12F	108	031	2 round ports:16mm 2 round ports:20mm 2 round ports:23mm
GJS-6004 II(Bunchy)	12-24F	144	032	
GJS-6004III(Bunchy)	24-48F	288	027	
GJS-6004Iv(Ribbon)	72F	288	026	

### Accessories

#### Standard Accessories:

No.	Name	Quantity	
1	Seal tape	1 roll	
2	Insulation tape	1 roll	
3	Abrasive cloth	1 pc	
4	Earthing wire	1pc	
5	Nylon tie	1 set	
6	Labeling paper	1 pc	

No.	Name	Quantity	
7	Desiccant	2 bags	
8	measuring paper	1 pc	
9	Special wrench	1 pc	
10	Hexagon wrench	2 pcs	
11	Heat shrinkable protective sleeve	1 bag	
12	Hanging hook	1 set	

#### Optional Accessories:

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	

No.	Name	Quantity	
4	Pole mounting bracket	1 set	
5	Wall mounting bracket	1 set	
6	Buffer tube for ribbon fiber	1 roll	



### Features

- Advanced internal structure design
- Easy to re-enter, it never requires re-entry tool it
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice Trays(FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°
- The curved diameter meets with international standard
- Easy and fast to increase and reduce FOSTs
- Straight-through for uncutting and branching for cutting the fiber

### Applications

- ◆ Suitable for bunchy & ribbon fibers
- ◆ Aerial, underground, wall-mounting, hand hole-mounting Pole-mountingand duct-mounting

### Structural Drawing

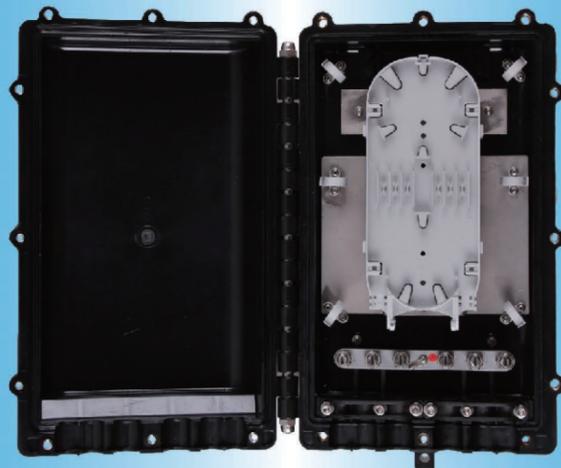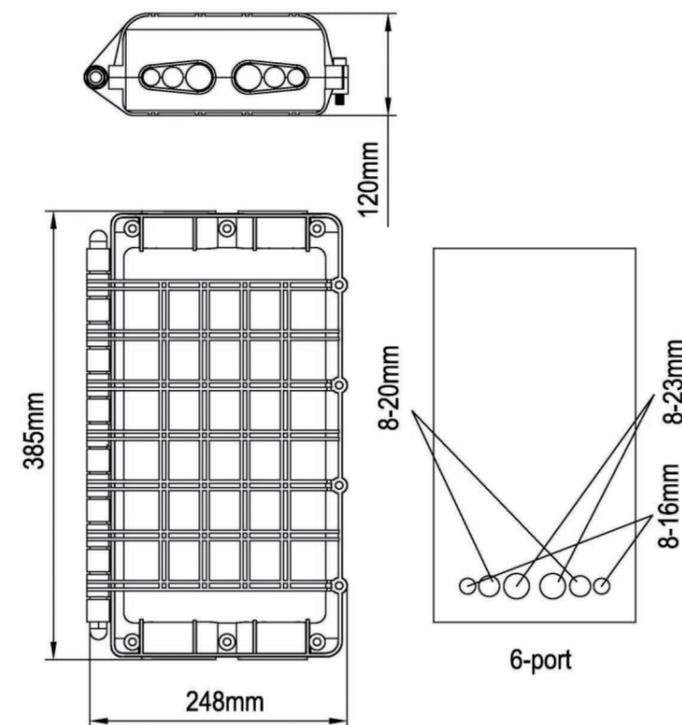

GJS-6004