


Ordering Information

Optical Splice Trays

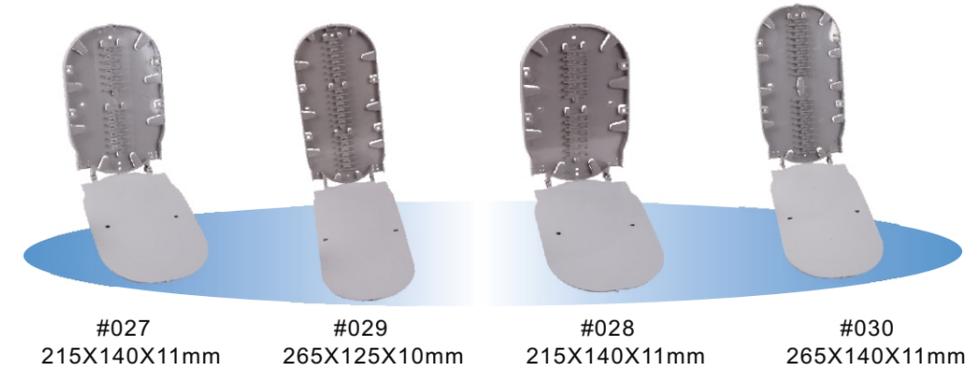

Type	Fibers/Tray	Max. Capacity	Tray#	Suitable Cable Dia. allowed(mm)
GJS-7008 I(Bunchy)	24-48F	288	027	1 big oval port:35mm 6 small round ports:20mm
GJS-7008 II(Bunchy)	36-72F	432	029	
GJS-7008 III(Ribbon)	144F	864	028	
GJS-7008IV(Ribbon)	216F	1080	030	

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Earthing wire	1 pc	
2	Nylon tie	1 set	
3	Labeling paper	1 pc	
4	Heat shrinkable protective sleeve	1 bag	

No.	Name	Quantity	
5	Desiccant	2 bags	
6	Special wrench	1 pc	
7	Aluminum-foil paper	1 pc	
8	Abrasive cloth	1 pc	

Optional Accessories:

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	
4	Big heat shrinkable fixing sleeve	1 pc	

No.	Name	Quantity	
5	Small heat shrinkable fixing sleeve	6 pcs	
6	Metal hoop	1 set	
7	Wall mounting bracket	1 set	
8	Buffer tube for ribbon fiber	1 roll	


Features

- Advanced internal structure design
- Easy to re-enter, it never requires re-entry tool kit
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice Trays(FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°
- The curved diameter meets with international standard
- Easy and fast to increase and reduce FOSTs
- Innovative elastic intergrated seal fitting
- The FOST base is provided with an oval inlet/outlet port

Applications

- ◆ Suitable for bunchy & ribbon fibers
- ◆ Pole-mounting, underground, wall-mounting, hand hole -Mounting and duct-mounting

Structural Drawing

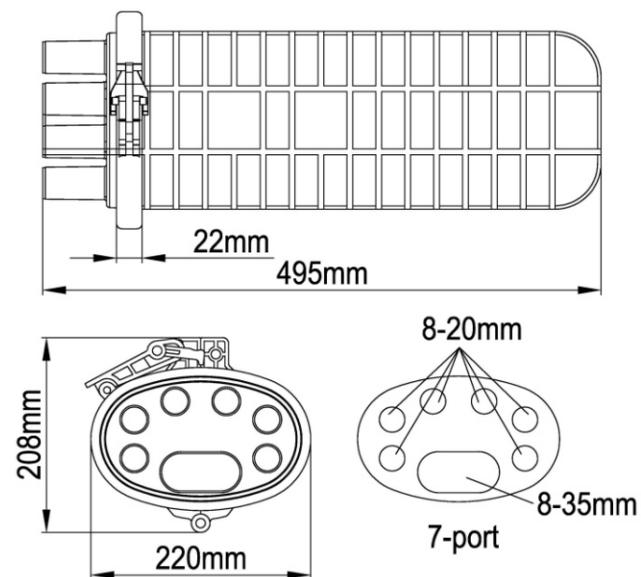

GJS-7008