



GJS-8006


Features

- Advanced internal structure design
- Easy and fast to fix fiber cable
- Fiber suffers no attenuation
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice Trays(FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°
- The curved diameter meets with international standard
- Easy and fast to increase and reduce FOSTs
- Innovative elastic intergrated seal fitting

Applications


- ◆ Suitable for bunchy & ribbon fibers
- ◆ Underground, wall-mounting, hand hole-mounting, Pole-mounting and duct-mounting

Structural Drawing

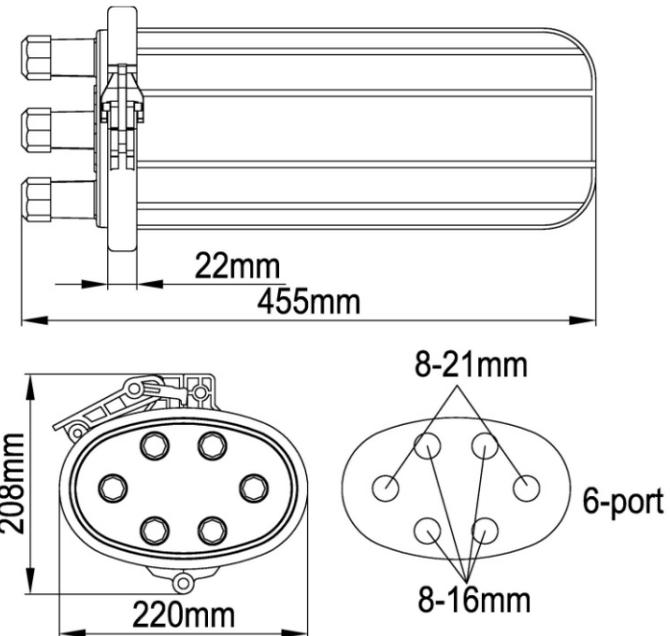

Ordering Information

Optical Splice Trays

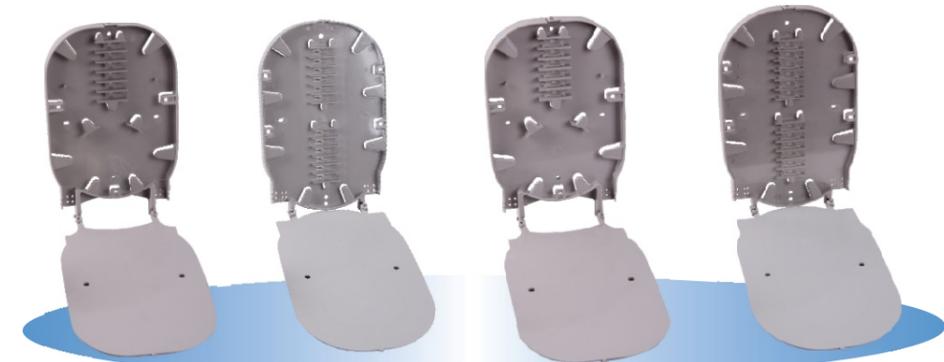

#025 205X135X11mm #027 215X140X11mm #026 205X135X11mm #028 215X140X11mm

| Type | Fibers/Tray | Max. Capacity | Tray# | Suitable Cable Dia. allowed(mm) |
|----------------------|-------------|---------------|-------|--|
| GJS-8006 I(Bunchy) | 12-24F | 144 | 025 | 4 round ports:16mm 2 round ports:21mm |
| GJS-8006 II(Bunchy) | 24-48F | 288 | 027 | |
| GJS-8006 III(Ribbon) | 72F | 432 | 026 | |
| GJS-8006 IV(Ribbon) | 144F | 864 | 028 | |

Accessories

Standard Accessories:

| No. | Name | Quantity | |
|-----|-----------------------------------|----------|--|
| 1 | Heat shrinkable protective sleeve | 1 bag | |
| 2 | Nylon tie | 1 set | |
| 3 | Earthing wire | 1 pc | |

| No. | Name | Quantity | |
|-----|----------------|----------|--|
| 4 | Special wrench | 2 pcs | |
| 5 | Desiccant | 2 bags | |
| 6 | Labeling paper | 1 pc | |

Optional Accessories:

| No. | Name | Quantity | |
|-----|------------------------------|----------|--|
| 1 | Pressure testing valve | 1 pc | |
| 2 | Earthing deriving device | 1 pc | |
| 3 | Buffer tube for bunchy fiber | 1 roll | |

| No. | Name | Quantity | |
|-----|------------------------------|----------|--|
| 4 | Wall mounting bracket | 1 set | |
| 5 | Metal hoop | 1 set | |
| 6 | Buffer tube for ribbon fiber | 1 roll | |