HI-SUN

FRONT

A—A

Max 734
Min 350

133

SIDE

1000

C—C

65

180

120

180

B—B

65

78 78

Max 734
Min 350

133

600

2000(42U)

931

931

20U

20U

Standard:
Comply with ANSI/EIA
RS-310-D、IEC60297-2、DIN41494;PART1;
DIN41494;PART7

Material:
SPCC Cold Rolled Steel;
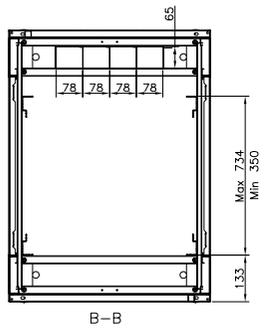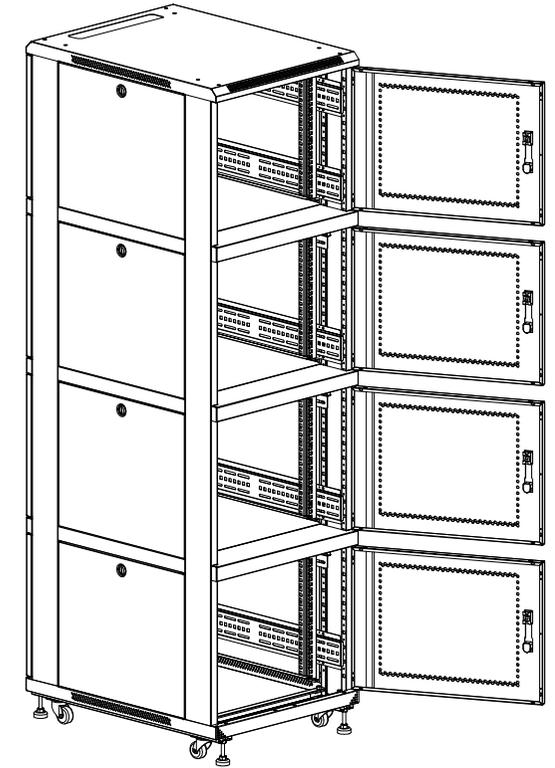19" rails:2.0mm, side panel:1.0mm,others: 1.2mm

Loading capacity:
Static loading: 600KG

IP rating:
IP20

Feature:
· *Flat packing and patent frame*,
· Exquisite design with precise dimension and
  craftsmanship;
· Adjustable feet and heavy duty castors are available
simultaneously;
· Cable entry on the top cover and bottom panel with
  adjustable sizes ;
· Optional installation of plinth to enable cabinets
  fixation, under-base cable entry/ventilation;
· Efficient and reliable cabinet connection by baying
kit;
· Removable side panels to ease maintain;

HI-SUN

FRONT

443.25

443.25

443.25

443.25

2000(42U)

600

9U

9U

9U

9U

A—A

Max 734
Min 350

133

SIDE

1000

65

120

180

C—C

B—B

65

78 78 78 78

Max 734
Min 350

133

Standard:
Comply with ANSI/EIA
RS-310-D、IEC60297-2、DIN41494;PART1；
DIN41494;PART7

Material:
SPCC Cold Rolled Steel；
19" rails：2.0mm, side panel:1.0mm,others: 1.2mm
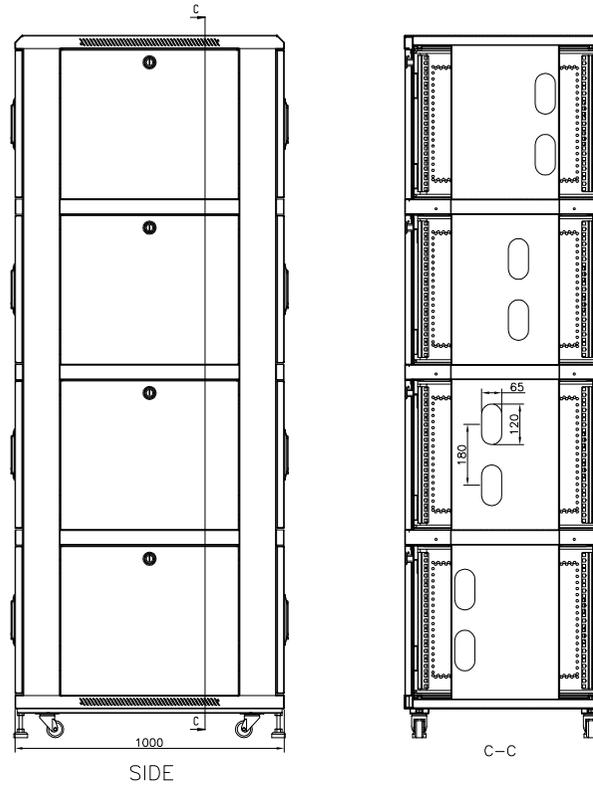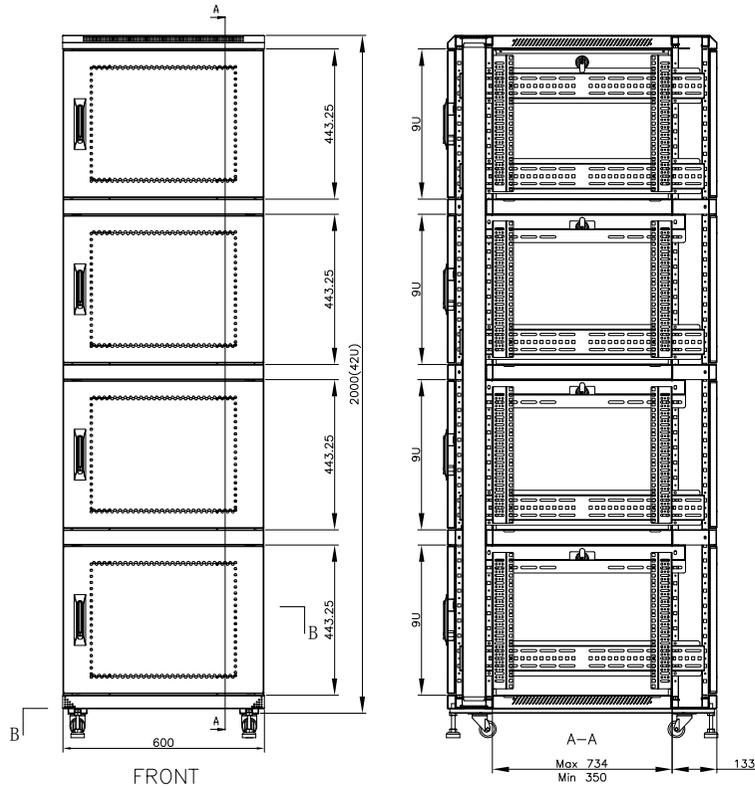
Loading capacity:
Static loading: 600KG

IP rating:
IP20

Feature:
· *Flat packing and patent frame，*
· Exquisite design with precise dimension and
   craftsmanship；
· Adjustable feet and heavy duty castors are available
simultaneously；
· Cable entry on the top cover and bottom panel with
   adjustable sizes ；
· Optional installation of plinth to enable cabinets
   fixation, under-base cable entry/ventilation;
· Efficient and reliable cabinet connection by baying
kit；
· Removable side panels to ease maintain；

HI-SUN

FRONT

B—B

A—A

Max 734
Min 545

133

SIDE

1000

2000(42U)

443.25

443.25

443.25

443.25

800

9U

9U

9U

20U

490

Max 734
Min 545

75

Standard:
Comply with ANSI/EIA
RS-310-D、IEC60297-2、DIN41494;PART1；
DIN41494;PART7

Material:
SPCC Cold Rolled Steel；
19" rails：2.0mm, side panel:1.0mm,others: 1.2mm

Loading capacity:
Static loading: 600KG

IP rating:
IP20

Feature:
· *Flat packing and patent frame*，
· Exquisite design with precise dimension and
  craftsmanship；
· Adjustable feet and heavy duty castors are available
simultaneously；
· Cable entry on the top cover and bottom panel with
  adjustable sizes ；
· Optional installation of plinth to enable cabinets
  fixation, under-base cable entry/ventilation;
· Efficient and reliable cabinet connection by baying
kit；
· Removable side panels to ease maintain；