

STRUCTURE CABLING

UNSHIELDED KEYSTONE JACK

VK-8002-C5E/C6



- LSA Block
- UTP,90 Degree

VK-8003-C5E/C6



- Narrow Type
- Dual or LSA Block
- UTP,90 Degree

VK-8004-C5E/C6



- 110 Block
- UTP,90 Degree

VK-8005-C5E/C6



- LSA Block
- UTP,90 Degree

VK-8006-C5E/C6



- LSA Block
- UTP,90 Degree
- 6 to 50µm gold plated

VK-8007-C5E/C6




- 110 Block
- UTP,90 Degree

VK-8008-C5E/C6



- LSA Block
- UTP,90 Degree

VK-8009-5E/C6

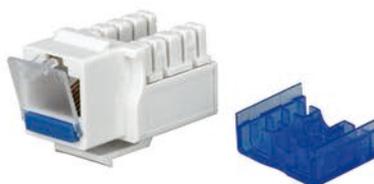

- LSA Block
- UTP,90 Degree
- Cover Design

- Meet or exceed Cat.5E EIA/TIA 568B.2 Standard
- Housing And Cover: Fireproof PC/ABS UL-94V0
- RJ45 JACK: PBT UL-94V0
- Contact-8P8C Phosphor bronze with 6 to 50µm goldplated
- PCB: FR-4/1.6mm UL-94V0
- IDC: Body-Fireproof PC/ABS UL-94V0
Pin-Phosphor bronze & Tinned
- Suitable For 22-26 AWG Cable
- High reliability and superior performance