

150mm DEEP RECESSED FOR FTTH APPLICATIONS WITH COLLAR




- **Construction:** Manufactured from 1.2mm cold rolled carbon sheet steel coated with polyester powder structure paint, with welded steel frame gland plates at the top and bottom /12 cable entry holes at the top. One pair of fully adjustable 1.5mm 19" profiles with universal punching are fitted in every enclosure. Wall mounting holes at the rear for easy mounting
- **Rear Plate:** Fixed.
- **Front Door:** Made from 3mm tempered glass and vented frame with left and right side hinge option and fitted with cylinder lock and keys.
- **Ventilation:** Datacom's multislotted four sided vented frame incorporated in the front glass door design provides adequate ventilation
- **Rating:** IP 20.
- **Finish:** Painted with high quality polyester baked oven dried protective paint
- **Colour:** RAL 7035 Grey to DIN 43-656.
- **Packing:** Supplied assembled.

Type A cabinet is with gland plates at the top and bottom -DC-RK-1 2WS-2RB

Type B cabinet is with 12 cable entry holes at the top -DC-RK-1 2WS-2RB-1

TECHNICAL SPECIFICATIONS

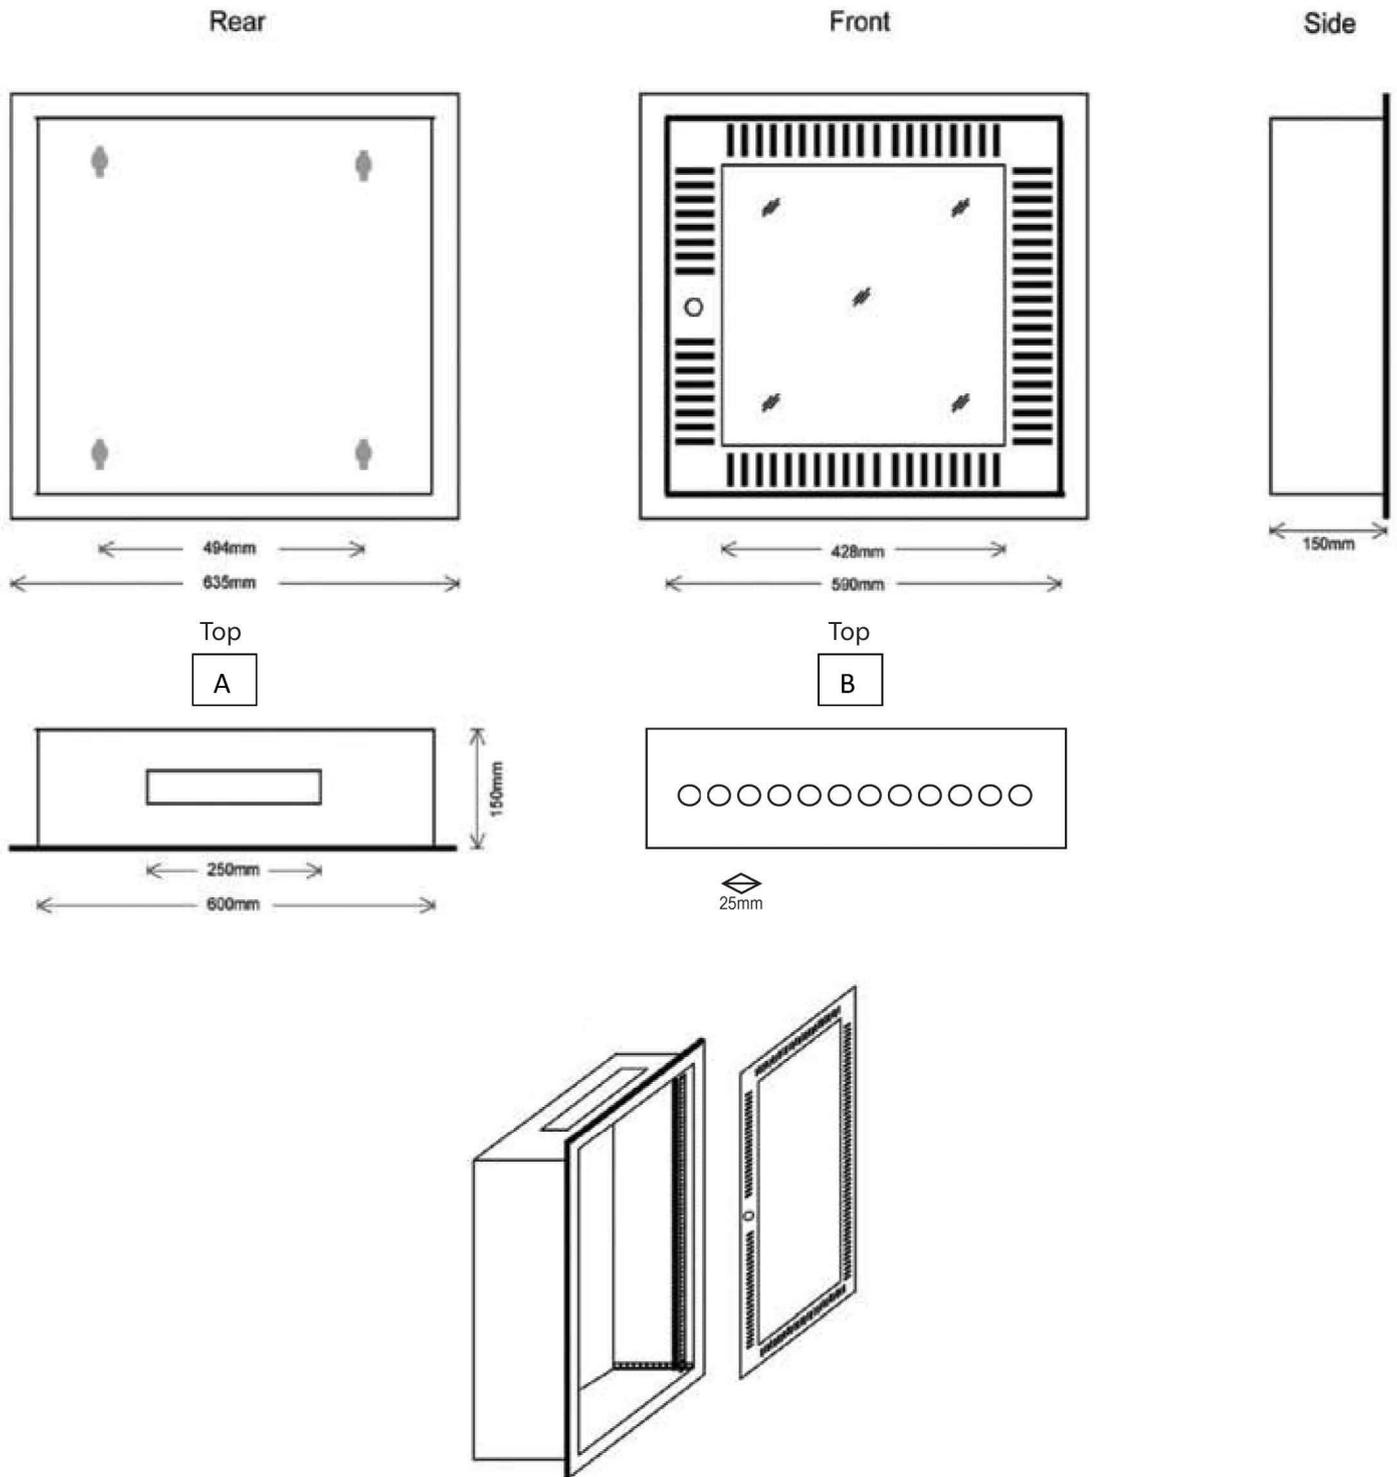

ORDERING INFORMATION

Effective Height in U	Width mm	Overall Depth mm*	Order Code
12U	600	150	DC-RK-12WS-2RB
12U	600	150	DC-RK-12WS-2RB-1