


STRUCTURE CABLING

WATERPROOF COUPLER

VK-3368-C6

VK-3368-C6A

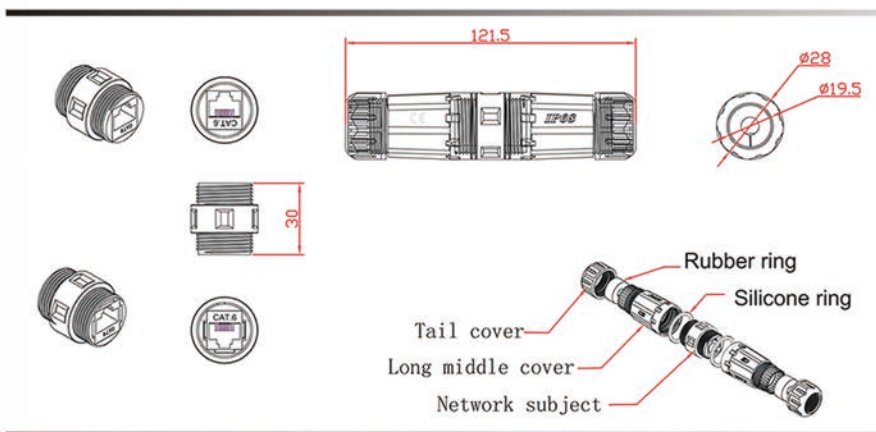

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING:125 VAC RMS
- 2.CURRENT RATING: 1.5AMP
- 3.CONTACT RESISTANCE:100MILLIOHMS MAX
- 4.INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
- 5.DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

- 1.STORAGE:-40°TO +85°
- 2.OPERATION:-20°TO 70°

MECHANICAL:

- 1.HOUSING MATERIAL: PA66
- 2.INSERT MATERIAL: FAME RETARDANCY PBT
- 3.PCB MATERIAL: FR-4 T=1.6mm
- 4.RJ45 JACK CONTACT: PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED (3U/6U/15U/30U/50U)
- 5.RJ45 JACK LIFE:750 TIMES MIN
- 6.Waterproof grade: IP68
- 7.CABLE OD: 5.0 - 7.5mm

